# This Page Is Inserted by IFW Operations and is not a part of the Official Record

# **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

#### PCT

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: WO 97/03646 (11) International Publication Number: A61K 7/50, 7/00 A1 (43) International Publication Date: 6 February 1997 (06.02.97) PCT/GB96/01744 (21) International Application Number: (81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, (22) International Filing Date: 19 July 1996 (19.07.96) MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian (30) Priority Data: patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, 9515023.1 21 July 1995 (21.07.95) GB LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, MIL, MR, NE, SN, TD, TG). (71) Applicant (for all designated States except US): CUSSONS (INTERNATIONAL) LIMITED [GB/GB]; Cussons House, Bird Hall Lane, Stockport SK3 0XN (GB). Published With international search report. (72) Inventors; and (75) Inventors/Applicants (for US only): HALL, Christopher, John Before the expiration of the time limit for amending the [GB/GB]; 24 Gladstone Avenue, Chester, Cheshire CH1 claims and to be republished in the event of the receipt of 4JU (GB). YAQUB, Najern [GB/GB]; 47 Frederick Street, amendments. Oldham, Lancashire OL8 4AG (GB). (74) Agent: LOW, Peter, John; 41-51 Royal Exchange, Manchester M2 7BD (GB).

#### (54) Title: CLEANING COMPOSITION

#### (57) Abstract

A post-foaming gel composition for use in an aerosol container which composition comprises a base material, said base material consisting at least of a detergent such as an anionic surfactant and a thickener which is preferably an alkanolamide, a glyceryl ester or derivative or blend thereof with betaine or a gum. The base material has a viscosity of at least 9,500 cps, preferably at least 20,000 cps or higher. A foam forming propellant gas such as pentane is mixed with the base material, the propellant being maintained in suspension in the composition until the composition is dispensed from an aerosol.

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Amenia	GB	United Kingdom	MW	Malawi
ΑT	Austria	GE	Georgia	MX	Mexico
ΑU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	ഥ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

#### CLEANING COMPOSITION

This invention relates to a cleaning composition and more particularly a personal cleaning composition intended for use in a shower.

Although personal cleaning compositions have been developed for showers, such as shower gels, a significantly large number of people prefer to use a conventional bar of soap rather than a shower gel. is believed that one factor responsible for resistance to the use of shower gels is connected to lather generation. Shower gels are provided in containers or dispensers from which the user must obtain a dose. This finite amount of gel will produce a finite amount of lather. In order to produce the lather the user must apply shear to the gel, for example by rubbing the gel on a part of the body. However, the lather so produced is soon washed away by the stream of water from the shower head. Indeed, in some cases the gel can be washed away and wasted before the user has been able to apply the gel to a part of the body and create A bar of soap, on the other hand, provides a continuous supply of lather even if the stream of water from the shower head is directed onto the soap bar.

In order to deal with this problem it has been proposed to make provision for the generation of lather

from a shower gel as soon as possible after the gel is dispensed. One way of effecting this is to use an aerosol to contain the gel. On release of the contents of the aeros l a foam in the f rm of a mousse is formed substantially instantaneously. The problem with this proposal is that it is a widely held belief that the generation of a lather by the user of a cleaning composition is essential for satisfactory cleaning. The application of a preformed lather, even if perfectly efficacious is not thought to be so.

WO96/09032A discloses a soap free post-foaming gel composition which is particularly intended for wet shaving using a razor. The composition is preferably prepared by forming a base material consisting of water, a water soluble N-acyl sarcosinate salt and a non-volatile paraffinic hydrocarbon. To this thin, relatively low viscosity mixture is added a volatile hydrocarbon such as isopentane. This addition causes the formation of a gel structure. While this composition is satisfactory for its intended purpose of a shaving foam it does not perform well for personal washing mainly because it gives an uncomfortable "stripped" feeling to the skin. This effect is believed to be caused by the composition removing the natural skin lipids which gives a "squeaky" skin feel which users dislike.

The present invention is intended to provide a post foaming gel composition for personal cleaning which feels good to use.

According to the invention there is provided a cleaning composition for use in an aerosol container, said composition comprising (a) a base material which consists at least of a detergent and a thickener, said base material having a viscosity greater than 9,500 cps and (b) a foam forming material, at least a part of the foam forming material being maintained in suspension in the composition until after the composition is dispensed from the aerosol.

An important feature of the invention is the viscosity of the base material which is such that the base material is already in the form of a gel prior to the inclusion of the propellant. The minimum viscosity of the base material is, as stated, 9,500 cps (measured on a Brookfield viscometer [spindle 4/speed 20]).

Preferably, however, the viscosity of the base material is considerably higher, for example above 20,000 cps and more preferably above 30,000 cps and particularly preferably above 60,000 cps (on the same basis of measurement). The base material in the form of a gel is stable and enables a high level of propellant to be included in the composition. The viscosity of the gel composition provides for control of the rate of foaming

when the composition is dispensed from the container. In addition the relatively high viscosity of the composition gives stability to the composition during storage prior to use.

It has been found that the foam produced by compositions of the invention have a very different structure to the prior art foams produced from postfoaming compositions. The prior art foam consists of a plurality of small closed cells with a few slightly larger cells here and there. The foam obtained with the invention comprises a plurality of large cells, that is to say up to ten times the size of the largest cells in the prior art foam, with smaller cells filling in the spaces between the larger cells. These smaller cells are in most cases bigger than the largest cells in the prior art foam. The foam of the invention has a high volume and a creamy texture and does not impart the so-called stripping feel to the skin that is experienced with prior art foams.

A preferred embodiment of the invention is intended for use in a shower. In that embodiment a level of propellant is used, for example above 9.0% by weight, which is higher than in prior art foams used for shaving. It has been found that the composition of the invention with such higher levels of propellant are easily rinsed away when used in a shower or other

circumstances such as hand washing. Prior art foam, especially foam intended for shaving, with its small cell structure is less readily rinsed away. A shower foam with such a "tight" structure is less readily rinsed away, but instead remains as a foam when washed from the skin and can clog up the waste outlet.

When the composition of the invention is used the formation of a foam or lather is delayed for a short time after the composition is dispensed by virtue of the propellant gas being retained in suspension. Very shortly after dispense agitation of the composition by the user causes the gas to permeate through the composition and a lather or foam is formed. Thus it appears that the user is responsible for creating the lather or foam as with conventional cleaning materials and the composition is seen as providing the behaviour expected for a good cleaning operation.

The thickener used in the composition of the invention must be one that will maintain the propellant gas in suspension until after the composition is dispensed from the aerosol container. Thickeners useful in the present invention include polyacrylic acids, natural and synthetic clays, alginates, collagen thickeners, cellulose thickeners, gelatin, glycerin based thickeners, guar thickeners, polyquaternium thickeners, xantham gum, acrylate copolymers,

polyethylene glycol thickeners and glycol esters. The preferred thickeners include alkanolamides such as coconut diethanolamide, glyceryl esters and derivatives and blends thereof such as glyceryl laurate together with cocamidepropyl betaine and guar gums such as hydroxypropyl trimonium chloride. The amount of thickener used depends upon the particular thickener employed. For example in the case of coconut diethanolamide from 0.05 to 20.0%, preferably from about 2 to 4% and more preferably 3.0% by weight will generally be adequate. With the glyceryl laurate/cocamidopropyl betaine blend amounts of from 0.05 to 30% preferably from 5 to 10% by weight are preferably employed.

The composition of the invention requires sufficient foam forming material so that the composition does not thin and separate. In addition the detergent should also be present in an amount which does not result in the composition thinning.

Preferably the amount of detergent should be in the range 0.05 to 60.0% and preferably not less than 7% and more preferably not less than 15% by weight of the total composition.

The particular foam forming material and surfactant system used in the composition is not critical and they can be chosen according to the

particular type of composition that is being formulated.

The preferred foam forming materials are saturated aliphatic hydrocarbons having from 4 to 5 carbons such as n-butane, iso-butane, n-pentane and iso-pentane.

Detergents which can be used in this invention include anionic, cationic, nonionic, amphoteric surfactants and mixtures thereof. Detergents which are useful include alkyl polyglucosides, ethoxylated and non-ethoxylated metal alkyl sulphanates, sultanes, taurates, sarcosinates, sulphonates, ether carboxylates, glycinates, quaternary ammonium compounds, polysorbates, sugar esters, alkyl phosphates, propionates, amino acid surfactants, glysides, alkanolamides and betaines.

The particularly preferred detergents used in the invention are anionic surfactants such as alkali metal alkyl ether sulphates, sulphosuccinates and acyl glutamates. A particularly preferred surfactant is sodium lauryl ether sulphate. If desired a mixture of surfactants can be used. These may be all anionic or may be a combination of anionic with one or more of nonionic, amphoteric and cationic surfactants.

The aerosol container may be any such container that can dispense a post foaming gel.

The invention is further illustrated by the following Examples, reference being also made to the accompanying drawings in which:-

Fig.1 shows the foam of the invention magnified ten times; and

Fig.2 shows a prior art shaving foam also magnified ten times.

#### EXAMPLE 1

The following base material was prepared (all percentages by weight based on the weight of the final composition):-

Cocamidopropyl betaine	1.5%
Cocamidopropyl betaine & glyceryl	
Laurate Blend	7.0%
Aminoxide	0.9%
Sodium lauryl ether sulphate	18.0%
Hydroxypropyl Triammonium Guar	0.3%
Fragrance	0.7%
Water (value adjusted to)	71.6%

The resultant base material had a viscosity of 127, 500 cps using a Brookfield viscometer (spindle 4/speed/1). Isopentane was added in the amount of 10% and the resultant composition charged into a bag within an aerosol container.

Butane was used as the propellant gas outside the bag.

The composition was dispensed as a thick shear thinning gel. Foaming started after dispense and the foaming action was increased by agitation of the gel.

The invention is not limited to the above described specific embodiment and many variations and modifications can be made. In particular the invention is not restricted to shower gels and can be applied to other personal cleaning compositions such as hand wash and facial wash compositions and the like.

The foam of the invention was examined under a microscope at ten times magnification and the result is shown in Fig.1. As can be seen from the Fig. the foam consists of quite large cells 10 of varying shapes with smaller cells 12 filling in spaces between the larger cells. Fig.2 shows the foam produced from a prior art post foaming gel intended for shaving. That foam consists of much smaller, substantially circular cross section cells 14 with a few somewhat larger cells 16 interspersed at random intervals amongst the smaller cells.

The large cell structure of the foam produced by the composition of the invention is believed to be, at least in part, due to the amount of propellant in the composition. Further when the composition is used in a hot shower, the effect of heat on the composition is to cause the propellant to boil off quickly so that a large amount of foam is produced.

The composition of the invention was submitted to a test panel to assess various attributes or properties thereof. The panel also assessed the same attributes of a conventional bath foam and a conventional tablet of soap. The procedure was as follows:-

A small amount of each product was dispensed onto each panellists hand except for the tablet of soap which was used directly. Each panellist "lathered" (i.e. agitated the product) for 15 seconds followed by rinsing for 15 seconds. They then dried their hands with a towel. They were asked to award a score in respect of various attributes in accordance with the following Table 1.

		TABLE 1		
1. Ease of Sprea	ading			
V Difficult 1 2	<u>Difficult</u> 3 4	Moderate 5 6	Easy 7 8	<u>V Easy</u> 9 10
2. Rate Of Lath	ier Build Up			
<u>V Slow</u> 1 2	<u>Slow</u> 3 4	Moderate 5 6	Fast 7 8	<u>V Fast</u> 9 10
3. Amount Of I	ather			
V Little 1 2	<u>Little</u> 3 4	Medium 5 6	<u>Much</u> 7 8	<u>Y Much</u> 9 10

4.	Lat	her	Tex	ture

V Thin		I	Thin		<b>Moderate</b>		Creamy		V Creamy	
1	2	3	4	5	6	7	8	9	10	

## 5. Ease of Rinsing

УD	ifficult	Diffi	cult	Mod	crate	Ea	SY	. <u>Y</u> .E	asy
1	2	3	4	5	6	7	8	9	10

## 6. Feel of Wet Hands

Dislike	Dislike	Dislike	Dislike	Neither like	Like	Like	Like	Like
Extremely	V Much	Moderately	Slightly	Nor Dislike	Slightly	Moderately	Vmuch	Extremely
1	2	3	4	5	6	7	.8	9 *

## Dry Hands

## 7. Smoothness

V Rough		Rough		Medinm		Smooth		V Smooth	
1	2	3	4	5	6	7	8	9	10

## 8. Softness

V Harsh		Harsh		Mo	Medium		Soft		V Soft	
1	2	3	4	5	6	7	8	9	10	

## 9. Overall Product Acceptance

Dislike	Dislike	Dislike	Dislike	Neither like	Like	Like	Like	Like
Extremely	V Much	Moderately	Slightly	Nor Dislike	Slightly	Moderately	Vmuch	Extremely
1	2	3	4	5	6	7	8	9 `

## Skin Feel After 15 mins.

#### 10. Smoothness

V Rough		Rough		<u>Medium</u>		Smooth		V Smooth	
1	2	3	4	5	6	7	8	9	10

#### 11. Softness

V Harsh	Harsh	Medium	Soft	V Soft	
1 2	3. 4	5 .6	7 8	9 10	

# 12. Overall Product Acceptance

Dislike	Dislike	Dislike	Dislike	Neither like	Like	Like	Like	Like
Extremely	V Much	Moderately	Slightly	Nor Dislike	Slightly	Moderately	Vmuch	Extremely
1	2	3	4	5	6	7	8	9

The results of this evaluation are shown in Table 2.

TABLE 2

			<del>,                                      </del>	
Attribute	Bath Foam	Tablet Soap	Invention	Sig Level Invention vs. Best Score)
Ease of Spreading	6.2	7.05	7.85	< 0.1%
Rate of Lather Build Up	5.2	6.15	9.1	> 0.1%
Amount of Lather	5.05	. 5.7	9.1	> 0.1%
Lather Texture	4.75	6.9	9.15	> 0.1%
Ease of Rinsing	6.45	6.95	7.4	> 10%
Feel of Wet Hands	5.4	5.45	6.65	> 0.1%
Smoothness	6.5	6.0	7.25	> 1.0%
Softness	6.55	5.95	7.65	> 0.1%
Overall Product Acceptance	5.1	5.7	7.65	> 0.1%
Smoothness (after 15 mins)	5.95	5.8	7.35	> 0.1%
Softness (after 15 mins)	5.8	5.6	7.3	>0.1%
Overall Product Acceptance (after 15 mins)	5.1	5.25	7.3	> 0.1%

The method of production of the composition of the invention using different materials is illustrated in the following Examples 2 to 5. The ingredients used in these Examples are listed in the following Table 3. For convenience the ingredients are referred to by the number in the table.

## TABLE 3

Ingredient (CTFA Name)	Trade Name	Supplier
1). Sodium Lauryl Ether Sulphate SLES (25%)	-	Hickson-Manro
2). Cocamidopropyi Betaine	(Tego Betain L7)	TH Goldschmidt AG.
3). Aminoxide	(Aminoxide WS 35)	TH Goldschmidt AG.
4). Disodium EDTA	-	•
5). PEG 7 Glyceryl Cocoate	(Cetiol HE)	Henkel
6). Hydroxypropyl T ammonium Guar	ri- (Jaguar C162)	Rhone Poulenc
7). Fragrance	•	-
Coconut Diethar amide	nol (Rewomid DC 2	12/S) Rewo
9). Sodium Cocoyl isethionate	(Elfan AT 84G)	) Akzo-Nobel
10). Sodium Cocoyl Giutamate	(Hostapon KCG	) Hoescht
11). Preservative	(Euxyl K400)	Schulke & Mayr
12). Cocoamidoprop Betaine & Glyc Laurate	pyl (Antil HS 60) eryl	TH Goldschmidt AG.
13). PEG 4 Rapesed Amide	ed (Aminol N)	Chem - Y
14). PEG 200 Glyce Hydrog. Palmie (and) PEG 7 G Cocoate.	atate	80) Rewo
15). Methyl Cellulo	se (Benecel MP 94	3 W) Aqualon
16). Water	-	-

The amounts of the ingredients used in the Examples is set out in the f llowing Table 4.

TABLE 4

	Example 2	Example 3	Example 4	Example 5
1).	71.50%	54.0%	71.50%	71.50%
2).	5.00%	5.00%	5.00%	5.00%
3).	1.00%	1.00%	1.00%	1.00%
4).	0.15%	0.1%	0.15%	0.15%
5).	1.0%	-	1.0%	1.0%
6).	0.3%	0.5%	0.3%	0.3%
7).	0.7%	0.7%	0.7%	0.7%
8).	-	1.0%	•	-
9).	-	5.0%	-	-
10).	-	3.36%	•	-
11).	0.08%	0.08%	0.08%	0.08%
12).	-	8.00%	•	-
13).	5.00%	•	•	•
14).	-	•	5.00%	-
15).	• ,	•	-	1.0%
16).	balance	e balance	balance	balance

#### Example 2

Water was added to (1). The betaine (2) was then added followed by (3). (4) was then dissolved in the mixture. (5)(6) and (7) were mixed together in a premix which was then added to materials (1)-(4). The preservative (11) was then added followed by (13) and the product mixed until a viscosity of 130,000 cps (Brookfield, Spindle RV 4, Speed 0.5) was built.

#### Example 3

(8) was dissolved in (16) and then added to (1), (2), (3) and (10) were then added along with (4) until dissolved (6), (7) and (8) were premixed and then added to the aforementioned ingredients. (11) was then added followed by (12) and the product mixed until a viscosity of above 100,000 cps (Brookfield, Spindle RV4, Speed 1) was built.

#### Example 4

Water was added to (1). The betaine (2) was then added followed by (3). (4) was then dissolved in the mixture. (5)(6) and (7) were mixed together in a premix which was then added to materials (1)-(4). The preservative (11) was then added followed by (14) and the product mixed until a viscosity of 60,000 cps (Brookfield, Spindle RV4, Speed 2) was built.

Example-5

Water was added to (1) followed by (15). The betaine (2) was then added followed by (3). (4) was then dissolved in the mixture. (5), (6) and (7) were mixed together in a premix which was then added to materials (1)-(4). The preservative (11) was then added. The viscosity was 26,800 cps (Brookfield, Spindle RV4, Speed 2).

The base materials prepared in the foregoing Examples 2 to 5 were mixed with isopentane (95%) in a 9:1 ratio to produce the post-foaming gel composition of the invention. The composition was then charged to an aerosol can in the same way as in Example 1.


#### CLAIMS

- 1. A cleaning composition for use in an aerosol container, said composition comprising (a) a base material which consists at least of a detergent and a thickener, said base material having a viscosity greater than 9,500 cps and (b) a foam forming material, at least a part of the foam forming material being maintained in suspension in the composition until after the composition is dispensed from the aerosol.
- 2. A composition as claimed in Claim 1, wherein the viscosity is greater than 20,000 and preferably greater than 60,000 cps.
- 3. A composition as claimed in Claim 1 or Claim 2, wherein the thickener is selected from one or more of polyacrylic acids, natural clays, synthetic clays, alginates, collagen thickeners, cellulose thickeners, gelatin, glycerin based thickeners and guar thickeners, polyquaternium thickeners, xantham gum, acrylate copolymers, polyethylene glycol thickeners and glycol esters.
- 4. A composition as claimed in any preceding claim, wherein the thickener is an alkanolamide, a glyceryl ester or derivative thereof or a blend thereof with betaine and/or a qum.

- 5. A composition as claimed in Claim 4, wherein the alkanolamide thickener is present in an amount of from 2 to 4% by weight.
- 6. A composition as claimed in Claim 4, wherein the glyceryl blend is present in an amount of from 5 to 10% by weight.
- 7. A composition as claimed in any preceding claim, wherein the detergent is present in an amount not less than 7.0% by weight of the total composition.
- 8. A composition as claimed in any preceding claim, wherein the detergent is selected from one or more of anionic, cationic, nonionic, amphoteric or mixtures thereof.
- 9. A composition as claimed in any preceding claim, wherein the detergent is selected from one or more of alkyl polyglucosides, ethoxylated metal alkyl sulphanates, non-ethoxylated metal alkyl sulphanates, sultanes, taurates, sarcosinates, sulphonates, ether carboxylates, glycinates, quaternary ammonium compounds, polysorbates, sugar esters, alkyl phosphates, propionates, amino acid surfactants, glysides, alkanolamides or betaines.

10. A composition as claimed in any preceding claim, wherein the foam forming material is a saturated aliphatic hydrocarbon preferably having from 4 to 5 carbons.

WO 97/03646

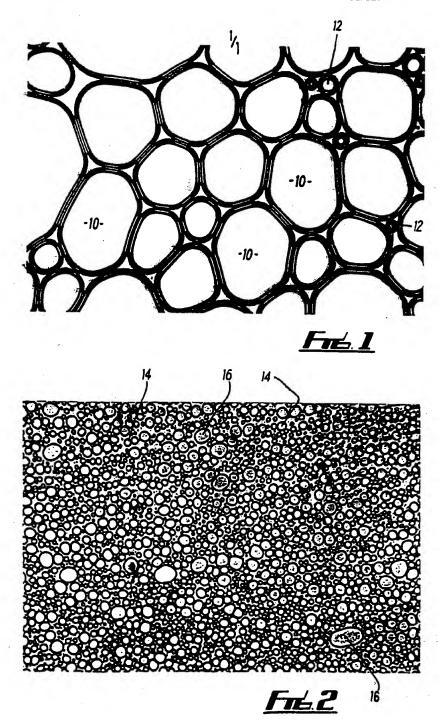

SUDSTITUTE SHEET (RULE 24)

#### INTEPNATIONAL SEARCH REPORT

Inv mal Application No Pc., GB 96/01744

A. CLASSIFICATION OF SUBJECT MATTER
1PC 6 A61K7/50 A61K7/00

According to International Patent Classification (IPC) or to both national classification and IPC

#### B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

_	 CONSIDERED	 0.00 mm / 4 x mm	

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
х	WO,A,95 13349 (DOWBRANDS) 13 May 1995	1,3,4, 7-10
	see claims 1-5,8,10,12,13,16 see page 4, line 28 - page 8, line 16 see page 10, line 22 - page 14, line 38	
x	WO,A,95 05796 (UNILEVER) 2 March 1995	1,3,4, 7-10
	see page 5, line 34-37; claims 1-3,5 see page 6, line 1-35 see page 7, line 9-23	, 2
X	WO,A,94 02109 (DOWBRANDS) 3 February 1994 see claims 1-3,14,15 see page 5, line 33 - page 6, line 10 see examples 9-12	1,3,7-10
	-/	

1		·
[	X Further documents are listed in the continuation of box C.	X Patent family members are listed in annex.
	Special categories of cited documents:  A' document defining the general state of the art which is not considered to be of particular relevance	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention.
	E' earlier document but published on or after the international filing date L' document which may throw doubts on priority claim(s) or	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
1	which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the daimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such docu-
!	O' document referring to an oral disclosure, use, exhibition or other means  P' document published prior to the international filing date but	ments, such combination being obvious to a person skilled in the art.
1	later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

9 December 1996 1 7. 12 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentiaan 2
NL - 2230 HY Rijswijk
Td. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Peeters, J

Form PCT/ISA/218 (second sheet) (July 1992)

1

## INTF"NATIONAL SEARCH REPORT

Int onal Application No
P. /GB 96/01744

	on) DOCUMENTS CONSIDERED TO BE RELEVANT  Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
(	DE,A,43 27 699 (HENKEL) 23 February 1995 see claims 1-3 see page 2, line 30 - page 3, line 45	1,3,7-10

1

## INTERNATIONAL SEARCH REPORT

J. stion on patent family members

in onal Application No F. /GB 96/91744

Patent document sited in search report	Publication date	Patent family member(s)		Publication date	
WO-A-9513349		AU-A-	1093495	29-05-95	
	02-03-95	US-A-	5443817	22-08-95	
		AU-A-	7612494	21-03-95	
		CA-A-	2127074	24- <del>0</del> 2-95	
•		EP-A-	0724424	<b>07-08-96</b>	
		US-A-	5496538	05-03-96	
		ZA-A-	9406412	23-02-96	
WO-A-9402109	03-02-94	AU-A-	4786893	14-02-94	
		CN-A-	1087380	01-06-94	
		EP-A-	0652739	17-05-95	
		ES-A-	2075820	01-10-95	
		FI-A-	950373	27-01-95 30-10-95	
		HU-A- JP-T-	70703 7509513	19-10-95	
		NO-A-	950309	27-01-95	
	•	PL-A-	307296	15-05-95	
		rL-M-	30/230	12-02-23	
DE-A-4327699	23-02-95	WO-A-	9505158	23-02-95	